



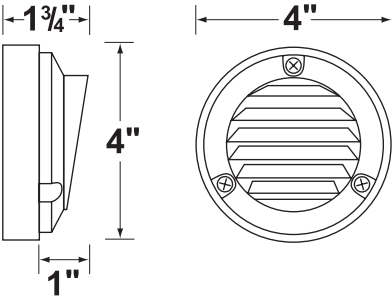



| | | | |
|------------------------------------|---|---|---|
| CL-352 | |  <p>CL-352</p>  |  LED AVAILABLE  <p>CX-839 CORONA UNIVERSAL CONNECTOR AVAILABLE</p> |
| Product Specification Sheet | | | |
| HOUSING: | Die-cast aluminum. | | |
| FINISH: | Polyester UV powder coated, available in BK-Black , BZ-Bronze , WH-White . | | |
| LENS: | Frosted, tempered and heat resistant glass sealed and secured to face plates, including gasket. | | |
| LAMP TYPE: | 12V, T5 wedge, 18W max. See lamp guide for T5 wedge base LED. | | |
| MOUNTING: | Surface mounted including mounting plate. For outdoor use only. |  |  <p>CORONA Lighting</p> <p>WWW.CORONALIGHTING.COM</p> <p>Tel: 800-727-9262 213-747-4500</p> <p>Fax: 800-727-9957 213-747-3234</p> |
| WIRING: | Fixture is prewired with a 3-foot pigtail of direct burial wire. | | |

- Fixture is supplied with 18W T5 Wedge lamp.
- Remote 12 Volt transformer is required.
- See transformers and accessories for variety of options and choices.