

WWW.CORONALIGHTING.COM

### Down Lights



### Assembly Instructions

- 1- Turn and pull out the faceplate or hood from housing of fixture.
- 2- Slide spring over the socket, so socket is inside the spring, and fit both into housing of fixture.
- 3- Carefully push bulb pins in socket holes. Then put the faceplate or hood back on housing, turn and push until it fits on housing completely.
- 4- Install the adjustable bar to wall with two screws and then adjust the direction of fixture to desired angle.

#### INSTRUCTIONS PERTAINING TO A RISK OF FIRE, OR INJURY TO PERSONS.


#### IMPORTANT SAFETY INSTRUCTIONS LIGHTED LAMP IS HOT!

#### Warning: TO REDUCE THE RISK OF FIRE OR INJURY TO PERSONS:

- Turn off/un-plug and allow to cool before replacing lamp.
- Lamp gets HOT quickly! Contact only switch/plug when turning on.
- Do not touch hot lens, guard or enclosure.
- Keep lamp away from materials that may burn.
- Do not touch the lamp at any time. Use a soft cloth.
- Oil from skin may damage lamp.
- Do not operate the luminaire fitting with a missing or damaged shield.

#### Caution:


Fixture(s) must be installed in accordance with all local codes and ordinances.  
Do not install within 10 feet of a pool, spa or fountain.

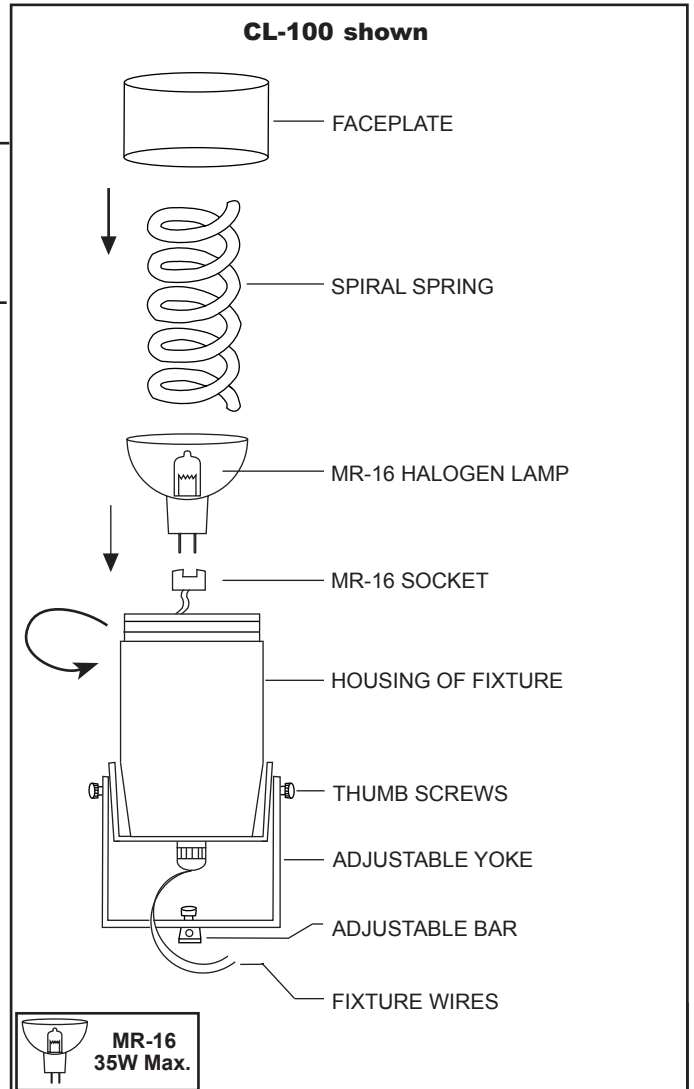

### Installation Instruction

Fixture(s) should be used **"ONLY"** with low voltage landscape power units that do not exceed 25A, 15V. The power units reduce the voltage from 120 volts to 12 volts. The main cable from power units should be buried for less than 6 inches under the ground level and can be purchased from your local electric supply house.

- 1- Loosen thumbscrew, and remove adjustable yoke from housing.
- 2- Using the adjustable yoke as a template find desired location, and mark the installation position through the mounting holes.
- 3- Use anchor screws to mount the yoke to mounting surface.
- 4- Reattach the fixture to the adjustable yoke, and tighten thumb screws.
- 5- Attach fixture wires to main cable with cable connector.

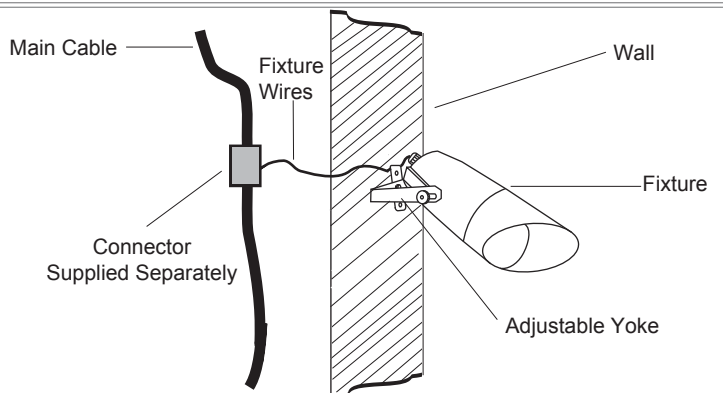

**CL-101 Shown**

### SAVE THESE INSTRUCTIONS

### Limited Warranty

Corona Lighting warrants its products to be free of defects in material and workmanship under normal use, when installed in accordance with installation instructions, specifications and accepted trade practices as follows:

- Brass, copper, and stainless steel fixtures: Limited lifetime warranty from date of invoice.
- LED Integrated Fixtures: Ten years warranty from date of invoice.
- Aluminum Fixtures (Architectural Grade): Five years warranty from date of invoice.
- Composite Fixtures (Architectural Grade): Ten years warranty from date of invoice.
- Aluminum & Composite Fixtures (Value Grade): One year warranty from date of invoice.
- LED Lamps: Five years warranty from date of invoice.
- Transformers: Ten years on coils, Lifetime warranty on Stainless Steel enclosure, and one year warranty on timers, photocells, and accessories; from date of invoice.

#### This warranty excludes:

1. Products not used in accordance with directions specified in installation instructions and subject to unauthorized repair.
2. Damages caused by accident, altercation, misuse, abuse and exceeding the cost of product.
3. Costs incurred in shipment, repair, replace, remove or install of product by buyer and others.

#### Other Conditions:

- Corona Lighting reserves the right to issue credit, repair or replace the defective product at our option upon receipt of written notification by original buyer of the alleged defect. Corona Lighting assumes no responsibility for improper installation of the product and shall not be liable for any incidental or consequential damages resulting from use of this product.
- Corona Lighting does not authorize any other warranty, verbal or written except as described here.
- Corona Lighting reserves the right to make any changes to its products without prior notice.

Visit [Coronalighting.com](http://Coronalighting.com) for additional information on these and other products.

Corona Lighting, Inc. ; Los Angeles, California