



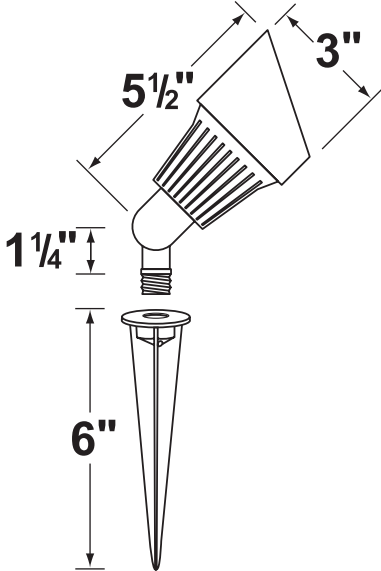



<b>CL-501</b>			
<b>Product Specification Sheet</b>			
<b>HOUSING:</b>	Die-cast aluminum.	 <p>CL-501-BK</p> 	 <p>CX-839 CORONA UNIVERSAL CONNECTOR AVAILABLE</p>
<b>FINISH:</b>	Polyester UV powder coated, available in <b>BK-Black</b> , <b>BZ-Bronze</b> , <b>GR-Green</b> , <b>RT-Rust</b> , <b>VG-Verde Green</b> , <b>WH-White</b> .		
<b>LENS:</b>	Clear, tempered, and heat resistant glass with silicone gasket.  See accessories & parts for special effect lenses, honeycomb louver and frosted glass lens CX-251-FR.		
<b>LAMP TYPE:</b>	12V, MR-16 halogen, 50W max.  See lamp guide for LED and color MR-16 lamps.		 <p>www.coronalighting.com</p> <p>Tel: 800-727-9262 213-747-4500</p> <p>Fax: 800-727-9957 213-747-3234</p>
<b>MOUNTING:</b>	Adjustable cast aluminum knuckle with 1/2" NPT, including ground spike. Wire connector excluded.  See accessories & parts for optional mounting hardware.		
<b>WIRING:</b>	Fixture is prewired with a 3-foot pigtail of direct burial cable.		

- Fixture is supplied with 20W MR-16 lamp.
- Remote 12 Volt transformer is required.
- See transformers and accessories for variety of options and choices.
- When ordering, add the 2 letter color code to the end of the product number.