



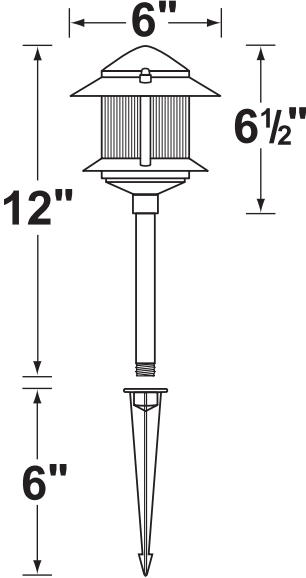



CL-605		 <p>CL-605</p> 	  <p>CX-839 CORONA UNIVERSAL CONNECTOR AVAILABLE</p>
DfcX i Wh'GdYWJÙWUUh]cb'G\YYh			
HOUSING:	Die-cast aluminum.		
FINISH:	Polyester UV powder coated, available in BK-Black, VG-Verde Green.		
LENS:	Clear ribbed high impact polycarbonate.		
LAMP TYPE:	12V, S.C. bayonet, 27W max. See lamp guide for xenon and halogen lamps with S.C. bayonet base.		
MOUNTING:	Aluminum stem with 1/2" NPT on bottom, including ground spike. See accessories & parts for optional mounting hardware.		
WIRING:	Fixture is prewired with a 3-foot pigtail of direct burial cable.		
			

ÁØäcc~!^Ää•Ä~]]|ä^âÄ , äc@ÄFì Y S.C. Bayonet lamp.

ÄÜ^ { [c^ÄFGÄVolt transformer is required.

ÄÜ^^Äc!æ} •~[! { ^!•Äæ} äÄæ&&^•• [!ä^•Ä- [!Äcæ!ä^c~Ä[-Ä [] cä [] •Äæ} äÄ&@ [ä&^•ÉÄ

Ä Y @^} Ä [! ä^!ä} *ÉÄæääÄc@^ÄGÄ|^cc^!Ä& [! [!Ä& [ä^Äc [Äc@^Ä^} äÄ [-Äc@^Ä] ; [ä~&cÄ} ~ { ä^!