



<b>CL-655B-OC</b>	
DfcX i Wh' GdYWJÜWUUh]cb' G\YYh	
<b>HOUSING:</b>	Solid brass shade, adjustable in height for light control (white inside).
<b>FINISH:</b>	<b>OC</b> -Old Copper.
<b>LENS:</b>	Clear glass, cover over lamp providing sprinkler-water protection, including silicone "O" ring gasket seals lens to socket housing to prevent moisture penetration
<b>LAMP TYPE:</b>	12V, S.C. bayonet, 27W max. Available with T5 wedge socket, 18W max.  See lamp guide for xenon and halogen lamps with S.C. bayonet base.
<b>MOUNTING:</b>	Brass stem with 1/2" NPT, can be stocked with variety of shades, tool free relamping, including ABS ground spike. Wire connector excluded.  See accessories & parts for optional mounting hardware.
<b>WIRING:</b>	Fixture is prewired with a 3-foot pigtail of direct burial cable.



CL-655B-OC



CX-839  
CORONA UNIVERSAL  
CONNECTOR AVAILABLE

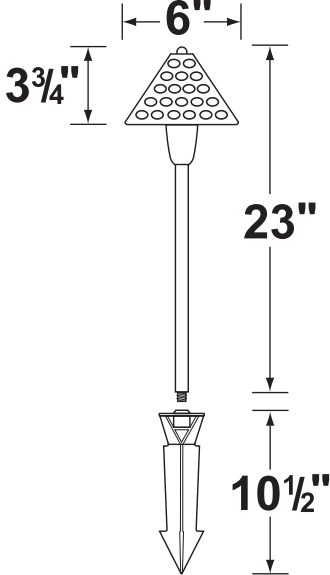

Tel: 800-727-9262  
213-747-4500  
:U!., \$\$!+&+!- -)+  
213-747-3234

ÁØäcc~!^Ää•Á~ ] ]|ä^äÁ , äc@ÄF ì Y ÁÜÈÔÈÄàæ^ [ }^cÁ|æ { ]ÉÁÁ  
 ÄÜ^ { [c^ÄFGÄV Volt transformer is required.  
 ÄÜ^^Äc|æ} •~ [ | { ^! •Äæ} äÄæ&&^•• [ |ä^•Ä- [ |Äçæ|ä^c^Ä [-Ä [ ] cä [ ] •Äæ} äÄ&@ [ ä^•É  
 Ä Y @^} Ä [ | ä^!ä } \*ÉÄæääÄc@^ÄGÄ|Äcc^!Ä& [ | [ | Ä& [ ä^Äc [ Äc@^Ä^} äÄ [-Äc@^Ä] ; [ ä~ &cÄ } ~ { ä^!