

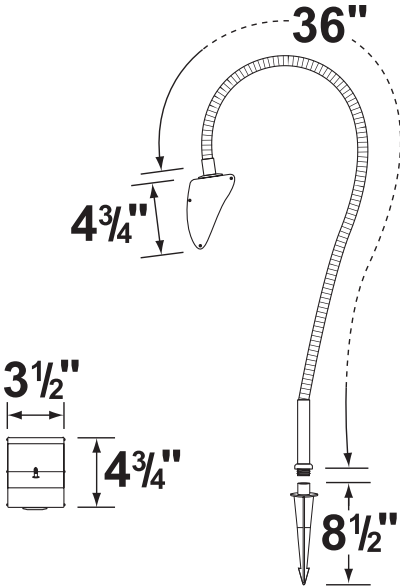


<b>CL-801-F</b>		 <p style="text-align: center;">CL-801-F</p>	<p style="text-align: center;"><b>XENON</b></p> <div style="text-align: center;">  <p><b>AVAILABLE</b></p> </div>
<b>Product Specification Sheet</b>			
<b>HOUSING:</b>	Die-cast aluminum with flexible steel black polyolefin shrink wrap arm, available in 12", 24", 36" length.		
<b>FINISH:</b>	Polyester UV powder coated, available in <b>BK-Black</b> .		
<b>LENS:</b>	Clear, tempered, and heat resistant glass.		
<b>LAMP TYPE:</b>	12V, T3 halogen, 35W max. See lamp guide for T3 xenon lamps.		<p style="text-align: center;"><b>CORONA</b> Lighting</p> <p style="text-align: center;"><a href="http://WWW.CORONALIGHTING.COM">WWW.CORONALIGHTING.COM</a></p> <p style="text-align: center;">Tel: 800-727-9262 213-747-4500</p> <p style="text-align: center;">Fax: 800-727-9957 213-747-3234</p>
<b>MOUNTING:</b>	1/2" NPT on bottom, including ground spike.		
<b>WIRING:</b>	Fixture is prewired with a 3-foot pigtail of cable.		

- Fixture is supplied with 20W T3 halogen lamp.
- Remote 12 Volt transformer is required.
- See transformers and accessories for variety of options and choices.
- To indicate an arm length, add "-BK-12", "-BK-24", "-BK-36" to the end of the product number.