

# SPECIFICATION SHEET

## PRODUCT # : CL-394B-AB

• Brick Light

• Cast Brass

### Fixture Specifications:

**Housing:** Heavy Duty Corrosion Resistant Cast Brass.

**Faceplate:** Diecast brass faceplate with frosted lens, fitted to stainless steel backplate.

**Finish:** **AB- Antique Bronze.** Natural toning process. AB finish will vary due to artistic process. Also available in: **GM-** Gun Metal & **SI-** Silver Plated

**Lighting Source:** Removable 5W LED module, 450 lumens, 3000K, 35W halogen equivalent. Rated hours: 30,000



**Wiring:** Fixture is prewired with a 25ft 18-2 SPT2-W direct burial cord. Wire connector sold separately. Silicone filled wire nut (**CX-854**) is available from Corona Lighting.

**Mounting:** Surface mounted on walls or steps. Best used on concrete, brick, or other masonry surfaces. Two screws and two anchor bolts are provided.

**Electrical Notes:** Removable LED module is dimmable. A remote 12V magnetic transformer is required. Options are available from Corona Lighting. Not for use with electronic transformers. Voltage range for LED module is: 8 -15Volt AC  
Ambient temperature: -40°F to 124°F. CRI: Ra > 80  
Proper grease/lubricant is suggested on threaded parts during installation process. Increasing voltage above 12 volts AC may decrease life of LED cores.


**Dimensions:** 8<sup>3</sup>/<sub>4</sub>" (Width) x 2<sup>1</sup>/<sub>2</sub>" (Height) x 1/2" (Depth)

**Warranty:** Limited lifetime warranty on fixture housing and faceplate against manufacturer's defects. Ten (10) year warranty on removable LED module.

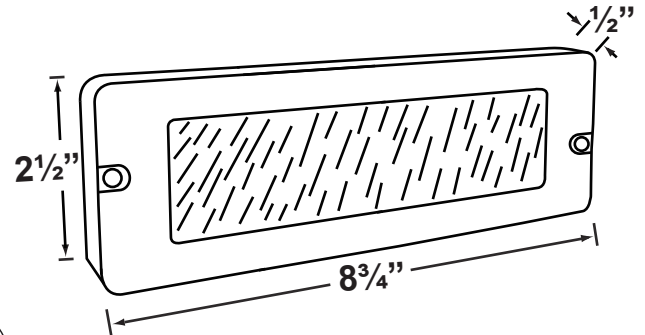

### Template of backplate

**NO BACKBOX REQUIRED**

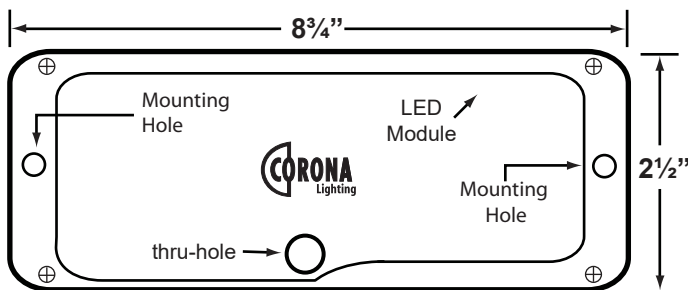

**NOTE:** This is the back of the Fixture. Looking from the front of the fixture the positions of through-hole and other details are reversed.

### JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

**PRODUCT # : CL-394B-AB**

• Brick Lights

• Cast Brass

**Cable Connector**

CX-854 Direct Burial Silicone Filled Wire Nut, Tan

