


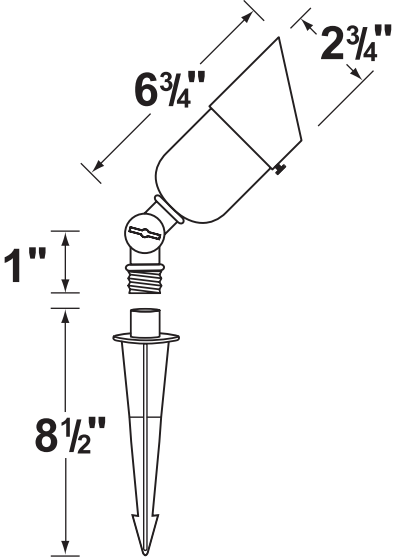



CL-521B-BR			
Product Specification Sheet			
HOUSING:	Solid brass. 360 degree rotatable shroud fitted to housing with silicone "O" ring gasket.	 <p>CL-521B-BR</p>	 <p>CX-839 CORONA UNIVERSAL CONNECTOR AVAILABLE</p>
FINISH:	BR-Natural Brass.		
LENS:	Clear, tempered, and heat resistant glass. See accessories & parts for special effect lenses and honeycomb louver.		
LAMP TYPE:	12V, MR-16 halogen, 50W max. See lamp guide for LED and color MR-16 lamps.		 <p>www.coronalighting.com</p> <p>Tel: 800-727-9262 213-747-4500</p> <p>Fax: 800-727-9957 213-747-3234</p>
MOUNTING:	Adjustable brass knuckle with 1/2" NPT, including ABS ground spike. Wire connector excluded. See accessories & parts for optional mounting hardware.		
WIRING:	Fixture is prewired with a 3-foot pigtail of direct burial cable.		

- Fixture is supplied with 20W MR-16 lamp.
- Remote 12 Volt transformer is required.
- See transformers and accessories for variety of options and choices.