

## **SPECIFICATION SHEET**

 1633 Staunton Ave

 Los Angeles, CA
 90021

 TEL.
 FAX.

 (800) 727-9262
 (800) 727-9957


 (213) 747-4500
 (213) 747-3234

E-Mail: sales@coronalighting.com

1

| PROD   | UCT # : C  | L-660               |                      |                   | •Area l          | ights                | • Aluminum   |
|--|--|---------------------|----------------------|-------------------|------------------|----------------------|--|
| Fixture  | Specificatio   | ons:                |                      |                   |                  |                      |  |
| Housing:   | Aluminum   |                     |                      |                   | Wiring:          |                      | Fixture is prewired with a 3-ft 18-2 direct burial cord.   |
| Stem:  | 18" Aluminum pipe<br>stem is also availa                     |                     | on bottom.           | 12"               |                  |                      | Wire connector sold seperately. Universal connector ( <b>CX-839</b> ) and silicone filled wire nut ( <b>CX-854</b> ) are available from Corona Lighting. |
| Finish:  | Polyester UV powo<br>and <b>BZ- Bronze</b>                   | der coated, av      | ailable in <b>Bl</b> | K-Black           | Mountin          | g Spike:             | Standard injection molded spike with ½" NPT threaded female hub.   |
| Lens:  | Clear tempered gla<br>sprinkler water pro                    |                     | er lamp provi        | iding             | Electric         | al Notes:            | A remote 12V transformer is required. Options are available from Corona Lighting.  |
| Socket:  | Top grade fixed ce<br>free lamp access.                      | ramic bi-pin s      | ocket. Easy          | tool              |                  |                      | Voltage range for LED lamps are 8V-21V.<br>Proper grease/lubricant is suggested on<br>threaded parts during installation process.                        |
| Lamp:  | 12V, T3, 20W max<br>Available in LED (2<br>See Lamp guide bo | 2W & 2.5W) o        |                      |                   | Warrant          | <b>y</b> :           | <b>Five (5) year</b> warranty on fixture housing and stem against manufacturer's defects.  |
| AVAILABLE  | CL-660-BK<br>18" Standard<br>Stem Shown                      | ona LED lamps ha    |                      | ar limited warraı | ED<br>& 2.5W     |                      | CL-660-BZ-12<br>12" Stem<br>(Optional) Shown   |
|  | R WATTS  | BE/<br>SPREAD       | AM<br>LUMEN          | COLOR & TEMP.     | RATED<br>HOURS   | HALOGEN<br>EQUIVALEN | r TYPE: DATE:  |
| L-EDT3-2W<br>L-EDT3-2.5W   | 2<br>2.5   | 360°<br>180°        | 200<br>240           | 2700K<br>2700K    | 25,000<br>25,000 | 20 Watt<br>35 Watt   | JOB NAME & ADDRESS:  |
| L-EDT3-2W-3  | K 2  | 360°                | 210                  | 3000K             | 25,000           | 20 Watt              | -  |
| L-EDT3-2.5W-<br>L-EDT3-AM*   | - <u>3K 2.5</u><br>2   | <u>180°</u><br>360° | 250<br>170           | 3000K<br>2000K    | 25,000<br>25,000 | 35 Watt<br>20 Watt   | PRODUCT #:   |
| * AM- Amber color  |  | 000                 | 170                  | 20001             | 20,000           |                      | - TOTAL QUANTITY:  |
| ✓ AM- Amber color<br>For more additional Lamps, and accessories visit Coronalighting.com |  |                     |                      |                   |                  |                      | LAMP TYPE & WATTAGE:   |
|  |  |                     |                      |                   |                  |                      | TRANSFORMER:   |
|  |  |                     |                      |                   |                  |                      | CONTRACTOR:  |
|  |  |                     |                      |                   |                  |                      | SPECIFIER:   |
|  |  |                     |                      |                   |                  |                      |  |
| When ordering  | g a halogen or xenon la                                      | amp add lamp r      | number to the        | end of the pro    | oduct number.    | If you are orde      | ering LED lamps you should follow the format below:  |
| • CL - p<br>CL -   | oroduct # - color<br>660 - BK                                |                     | wattage              |                   | Example: CL      |                      | 2W 3K  |

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixure without further notification.

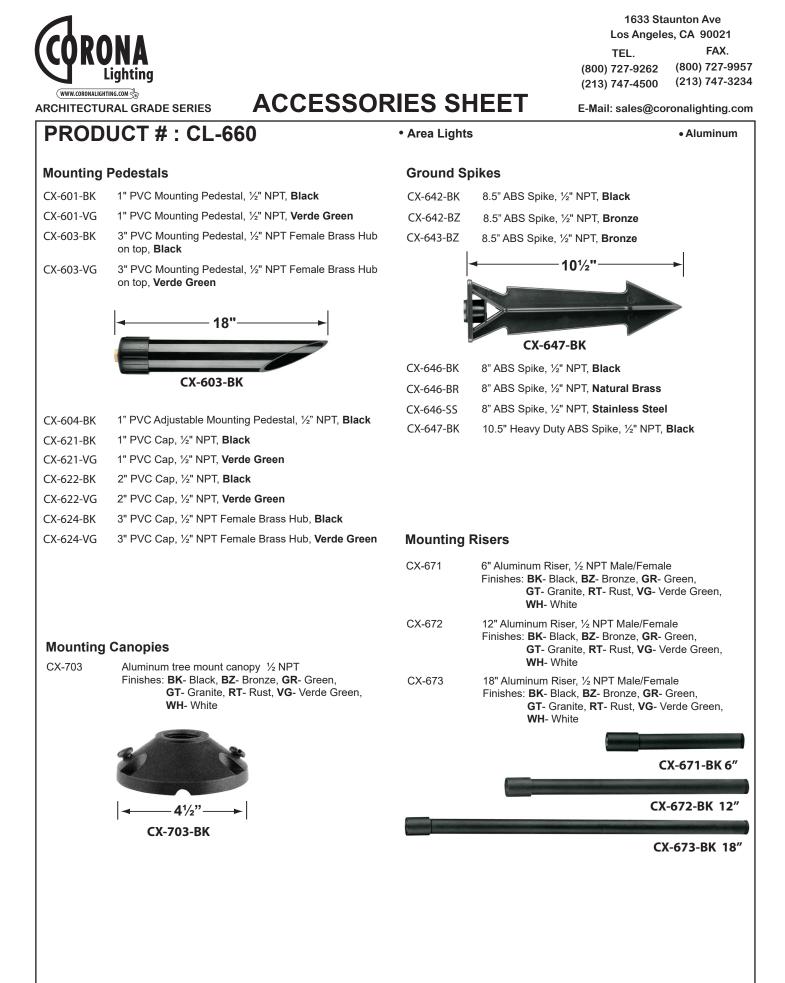

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixure without further notification.



# **ACCESSORIES SHEET**

Area Lights

 1633 Staunton Ave

 Los Angeles, CA 90021

 TEL.
 FAX.

 (800) 727-9262
 (800) 727-9957

 (213) 747-4500
 (213) 747-3234

E-Mail: sales@coronalighting.com

Aluminum

### PRODUCT # : CL-660

#### **Mounting Brackets**

| CX-700 | Aluminum Bracket, ½" NPT   |  |  |  |  |  |
|--------|--|--|--|--|--|--|
|        | Finishes: <b>BK-</b> Black, <b>BZ-</b> Bronze, <b>GR-</b> Green, |  |  |  |  |  |
|        | GT- Granite, RT- Rust, VG- Verde Green,                          |  |  |  |  |  |
|        | WH- White  |  |  |  |  |  |
| OV 704 | Aluminum Draskat 1/" NDT   |  |  |  |  |  |

CX-704 Aluminum Bracket, ½" NPT Finishes: **BK**- Black, **BZ**- Bronze, **GR**- Green, **GT**- Granite, **RT**- Rust, **VG**- Verde Green, **WH**- White







#### **Cable Connectors**

| CX-854 | Direct Burial Silicone Filled Wire Nut, Tan                              |
|--------|--|
| CX-858 | Speedy Cable Connector, Supply Cable up to 10-2, Black                   |
| CX-839 | Universal cable connector, Supply cable up to 8-2, one/Pack <b>Black</b> |

