

**SPECIFICATION SHEET** 

1633 Staunton Ave Los Angeles, CA 90021 TEL. FAX. (800) 727-9262 (800) 727-9957 (213) 747-4500 (213) 747-3234

E-Mail: sales@coronalighting.com

## PRODUCT # : CL-405-BT-GM


Directional Lights

Cast Brass

### **Fixture Specifications:**

rixture of				
Housing:	Corrosion Resistant Cast Brass	Gasket:	Silicone double gasketed for water-tight sealing	
Finish:	<b>GM</b> - Gun Metal Natural Toning process, color may vary.	Knuckle:	Swivel cast brass knuckle with thumb screw and $^{1\!\!/_2}$ NPT threaded male hub on bottom.	
Lens:	Also available in <b>AB</b> - Antique Bronze Clear, Convex Glass Lens. 15° & 60° reflectors included (see page 3)	Wiring:	Fixture is prewired with a 10ft 18-2 SPT-2W direct burial cord. Wire connector sold seperately. Universal connector ( <b>CX-839</b> ), and silicone filled wire	
Light Source:	Replacable 1-6W RGB LED module. Lumen output is between 15LM - 450LM. Standard 38° beam spread, with 15° & 60° options also included.	Mounting Spike:	nut ( <b>CX-854</b> ) are available from Corona Lighting. Standard injection molded 8½" large spike with ½" NPT threaded female hub on bottom.	
LED Features	CCT Options: Presets: 2700K, 3000K, 4000K, 5000K RGB : Unlimited color wheel options & quick presets. Dimming: Every color choice Scenes: Customizable scenes with up to 8 colors. Compatibility: Amazon's Alexa and Google Home	Electrical Notes:	A remote 12V transformer is required. Options are available from Corona Lighting. Voltage range for LED module is 10V-15V. Proper grease/lubricant is suggested on threaded parts during installation process.	
	Music: The lights will follow music collected by a phone microphone.	Warranty:	Lifetime limited warranty on fixture housing. Ten (10) years warranty on LED module.	

INTEGRATED

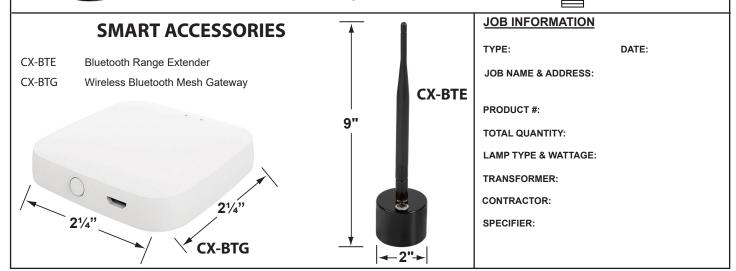



# **ACCESSORIES SHEET**

Directional Lights

1633 Staunton Ave Los Angeles, CA 90021 TEL. FAX. (800) 727-9262 (800) 727-9957 (213) 747-4500 (213) 747-3234


E-Mail: sales@coronalighting.com

Cast Brass

# PRODUCT # : CL-405-BT-GM

#### **Mounting Pedestals**

- CX-601-BK 1" PVC Mounting Pedestal, ½" NPT, **Black**
- CX-601-VG 1" PVC Mounting Pedestal, ½" NPT, Verde Green
- CX-603-BK 3" PVC Mounting Pedestal, <sup>1</sup>/<sub>2</sub>" NPT Female Brass Hub on top, **Black**
- CX-603-VG 3" PVC Mounting Pedestal, ½" NPT Female Brass Hub on top, Verde Green



CX-603-BK

CX-604-BK	1" PVC Adjustable Mounting Pedestal, ½" NPT, <b>Black</b>
CX-621-BK	1" PVC Cap, ½" NPT, <b>Black</b>
CX-621-VG	1" PVC Cap, 1/2" NPT, Verde Green
CX-622-BK	2" PVC Cap, ½" NPT, <b>Black</b>
CX-622-VG	2" PVC Cap, 1/2" NPT, Verde Green
CX-624-BK	3" PVC Cap, ½" NPT Female Brass Hub, Black
CX-624-VG	3" PVC Cap, ½" NPT Female Brass Hub, Verde Green

#### **Mounting Canopies**

11/2

-**2**<sup>3</sup>/4"

CX-709B-GM

CX-705B-GM Brass Flat Canopy, 1/2 NPT, Gun Metal CX-709B-GM Brass Raised Canopy, 1/2 NPT, Gun Metal CX-718B-GM 5" Brass Canopy, 3-Hole 1/2 NPT, Gun Metal CX-719B-GM Brass Tree Mounting Bracket, 1/2" NPT, Gun Metal Brass Tree mount Canopy with 9" Rubber Strap CX-720-BR stretches to 14, Natural Brass CX-721-BR Brass Tree mount Canopy with 15" Rubber Strap stretches to 22", Natural Brass CX-722-BR Brass Tree mount Canopy with 22" Rubber Strap stretches to 33", Natural Brass CX-723-BR Brass Tree mount Canopy with 31" Rubber Strap stretches to 45", Natural Brass

Ground Spikes				
CX-642-BK	8.5" ABS Spike, ½" NPT, <b>Black</b>			
CX-642-BZ	8.5" ABS Spike, ½" NPT, Bronze			
CX-643-BZ	8.5" ABS Spike, ½" NPT, Bronze			
-	101/2"			

#### CX-647-BK

CX-646-BK	8" ABS Spike, ½" NPT, <b>Black</b>
CX-646-BR	8" ABS Spike, ½" NPT, Natural Brass
CX-646-SS	8" ABS Spike, 1/2" NPT, Stainless Steel
CX-647-BK	10.5" Heavy Duty ABS Spike, ½" NPT, <b>Black</b>

#### **Mounting Risers**

CX-682B-GM	6" Brass Riser, ½ NPT Male/Female, Gun Metal
CX-683B-GM	12" Brass Riser, $\frac{1}{2}$ NPT Male/Female, Gun Metal
CX-684B-GM	18" Brass Riser, ½ NPT Male/Female, Gun Metal
CX-685B-GM	24" Brass Riser, ½ NPT Male/Female, Gun Metal



**2**<sup>7</sup>/8" -

CX-705B-GM

