

ARCHITECTURAL GRADE SERIES

SPECIFICATION SHEET

1633 Staunton Ave Los Angeles, CA 90021

TEL. FAX.

(800) 727-9262 (800) 727-9957 (213) 747-4500 (213) 747-3234

E-Mail: sales@coronalighting.com

PRODUCT #: CL-211-SS

Directional Lights

• 316 Marine Grade Stainless Steel

Fixture Specifications:

Housing: Solid Stainless Steel.

Finish: SS- Stainless Steel.

Lens: Clear and heat resistant convex glass.

Extra flat lens included.

Socket: Top grade ceramic bi-pin socket, with

retension clip.

Lamp: 12V, MR-16, 35W max.

Available in LED (3.5W & 5W) or without lamp. See the Lamp Guide below for more information.

Wiring: Fixture is prewired with a 3-ft 18-2 SPT2-W direct

burial cord. Wire connector sold seperately. Silicone filled wire nut (**CX-854**) is available from Corona

Lighting.

Gasket: Silicone "O" ring seals face plate to housing providing weather tight protection.

Yoke: Stainless steel yoke with ½" NPT bushing for

afixing mounting spike.

Mounting Spike: 10½" ABS mounting spike with ½" NPT

Electrical Notes: A remote 12V transformer is required. Options are


available from Corona Lighting.


Voltage range for LED lamps are 9V-17V. Proper grease/lubricant is suggested on threaded parts during installation process.

Warranty: Limited lifetime warranty on fixture housing against

manufacturer's defects.







AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects	,
--	---

		BEAM		COLOR &	RATED	HALOGEN
LAMP NUMBER	WATTS	SPREAD	LUMEN	TEMP.	HOURS	EQUIVALENT
L-ED16-3W-SP	3.5	15° Spot	270	2700K	50,000	25 Watt
L-ED16-3W-FL	3.5	45° Flood	270	2700K	50,000	25 Watt
L-ED16-3W-WF	3.5	60° Wide Flood	270	2700K	50,000	25 Watt
L-ED16-5W-SP	5	15° Spot	350	2700K	50,000	40 Watt
L-ED16-5W-FL	5	45° Flood	350	2700K	50,000	40 Watt
L-ED16-5W-WF	5	60° Wide Flood	350	2700K	50,000	40 Watt
L-ED16-COB5W-SP	5	15° Spot	450	2700K	50,000	50 Watt
L-ED16-COB5W-FL	5	38° Flood	450	2700K	50,000	50 Watt
L-ED16-COB5W-WF	5	60° Wide Flood	450	2700K	50,000	50 Watt
L-ED16-COB5W-SP3K	5	15° Spot	470	3000K	50,000	50 Watt
L-ED16-COB5W-FL3K	5	38° Flood	470	3000K	50,000	50 Watt
L-ED16-COB5W-WF3K	5	60° Wide Flood	470	3000K	50,000	50 Watt
Single color MR-16 LED available in AMBER, BLUE, GREEN, PURPLE, RED and VIOLET						

JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

•CL - product # - lamp - wattage - lamp angle

CL - CL-211-SS - L-ED16 - 5W - FL

Example: CL-211-SS-L-ED16-5W-FL

3.5W and 5W

[•] When ordering LED lamp with a fixture your part number should follow the format below:

ARCHITECTURAL GRADE SERIES

ACCESSORIES SHEET

1633 Staunton Ave Los Angeles, CA 90021

TEL. FAX. (800) 727-9262 (800) 727-9957 (213) 747-4500 (213) 747-3234

E-Mail: sales@coronalighting.com

PRODUCT #: CL-211-SS

Mounting Pedestals

CX-601-BK 1" PVC Mounting Pedestal, ½" NPT, Black


CX-601-VG 1" PVC Mounting Pedestal, ½" NPT, Verde Green

CX-603-BK 3" PVC Mounting Pedestal, ½" NPT Female Brass Hub

on top, Black

CX-603-VG 3" PVC Mounting Pedestal, ½" NPT Female Brass Hub

on top, Verde Green



CX-621-BK 1" PVC Cap, ½" NPT, **Black**

CX-621-VG 1" PVC Cap, 1/2" NPT, Verde Green

CX-622-BK 2" PVC Cap, ½" NPT, Black

CX-622-VG 2" PVC Cap, ½" NPT, Verde Green

CX-624-BK 3" PVC Cap, ½" NPT Female Brass Hub, Black

CX-624-VG 3" PVC Cap, ½" NPT Female Brass Hub, Verde Green

Special Lenses & Honeycomb Louvers

CX-238	MR-16 Snap-on holder, Silver Plated
CX-239	MR-16 honeycomb louver, Black
CX-240-AM	MR-16 color lens, Amber
CX-240-BL	MR-16 color lens, Blue
CX-240-GR	MR-16 color lens, Green
CX-240-RD	MR-16 color lens, Red
CX-240-YL	MR-16 color lens, Yellow
CX-241	MR-16 lens, Linear Spread
CX-242	MR-16 lens, Frosted
CX-243	MR-16 lens, Prismatic

• For MR-16 Lenses and Louvers, you will need the CX-238



Directional Lights

• 316 Marine Grade Stainless Steel


Ground Spikes

CX-647-BK 10" ABS Spike, 1/2" NPT, Black



Mounting Canopies

CX-705B-SI Brass Flat Canopy, ½ NPT, Silver Plated
CX-709B-SI Brass Raised Canopy, ½ NPT, Silver Plated

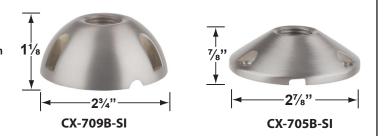

Cable Connectors

CX-854 Direct Burial Silicone Filled Wire Nut, Tan

