


# CL-220-AB

## SPECIFICATION SHEETS

### Fixture Configurations

Down Light .....	2
Well Light .....	3
Step Light .....	4

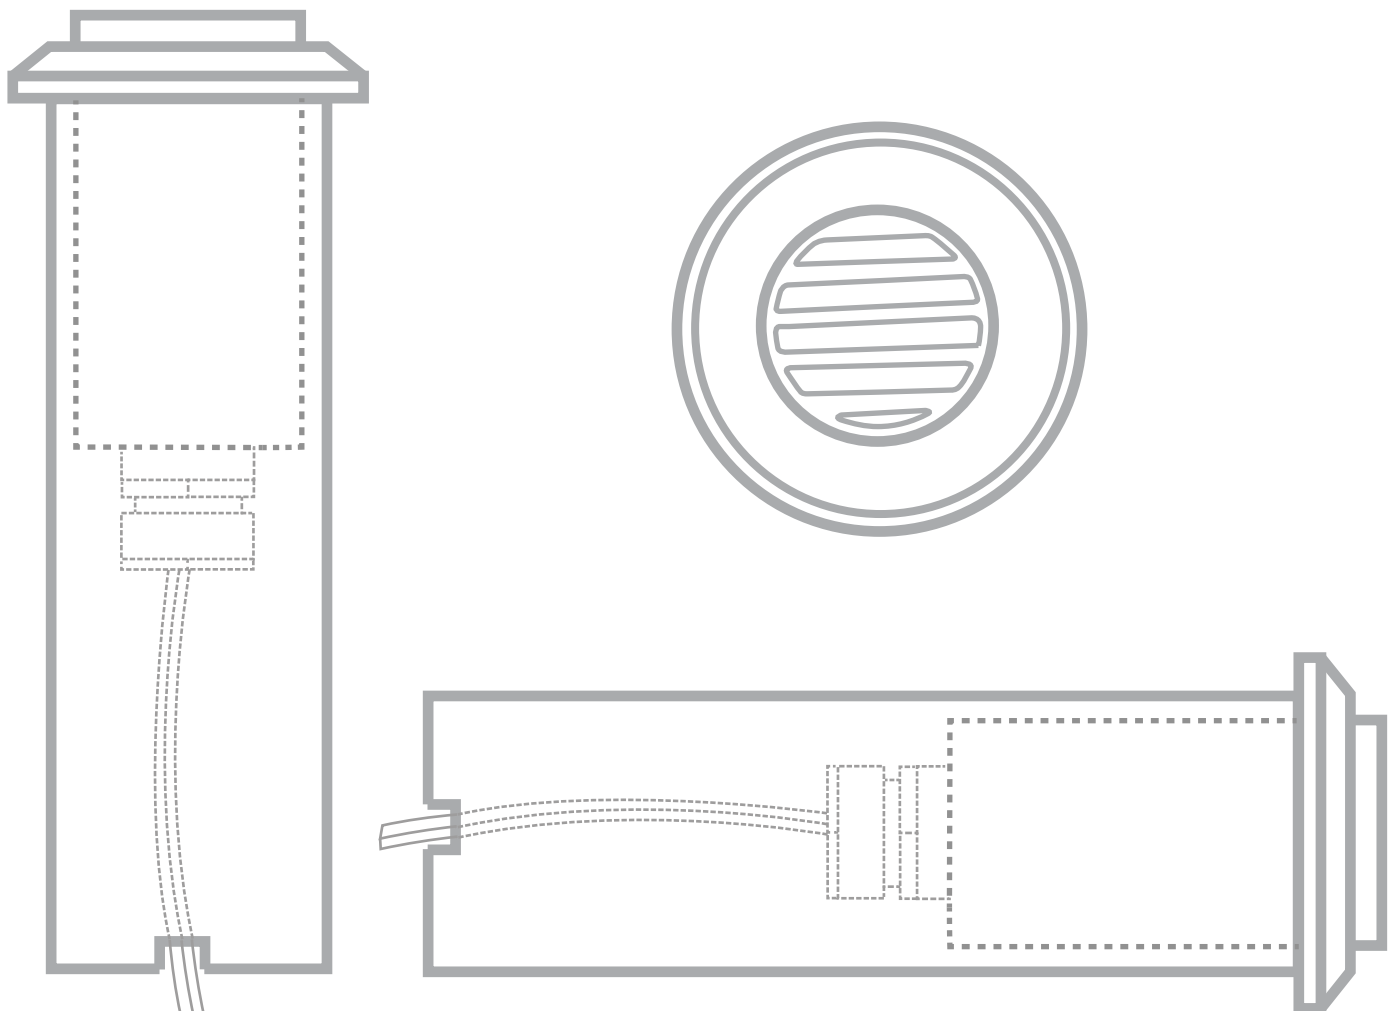

# SPECIFICATION SHEET

## PRODUCT # : CL-220-AB

• Down Lights

• Cast Brass

### Fixture Specifications:

**Housing:** Heavy duty corrosion resistant cast brass with PVC sleeve.

**Faceplate:** Louvered cast brass, fitted to housing with silicone "O" ring gasket.

**Finish:** **AB-** Antique Bronze. Natural toning process. Finishes may vary due to artistic process. Also available in **GM-** Gun Metal, or **SI-** Silver plated.

**Lens:** Clear and heat resistant tempered flat glass.

**Lighting Source:** Integrated CREE LED module, 3 watt, 210 lumens 120° beam spread, 3000K, 20W halogen equivalent. Rated hours: 30,000.

**Wiring:** Fixture is prewired with a 18-2 20ft SPT-1W direct burial cord, pre-stripped for easy connection. Wire connector sold separately. Universal connector (**CX-839**), and silicone filled wire nut (**CX-854**) are available from Corona Lighting.



**Gasket:** Silicone "O" ring, seals faceplate to housing, providing weather tight protection.

**Mounting:** Recessed flush mount. Best used in concrete, brick, or other masonry surface.


**Electrical Notes:** Integrated CREE LED module is dimmable. A remote 12V magnetic transformer is required. Options are available from Corona Lighting. Not for use with electronic transformers. Voltage range for LED module is 8-18 Volt AC. Ambient Temperature: -4°F to 104°F. CRI: Ra > 80 Proper grease/lubricant is suggested on threaded parts during installation process.

**Applications:** Ceilings, eaves, patio covers, or any place where a tiny recessed fixture may fit.

**Warranty:** Limited lifetime warranty on fixture housing and faceplate against manufacturer's defects. Ten (10) year warranty on LED modules and components.

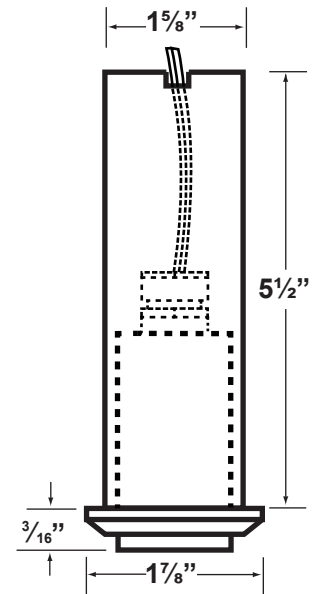

### DESIGNER COLOR LENSES INCLUDED WITH THIS FIXTURE:

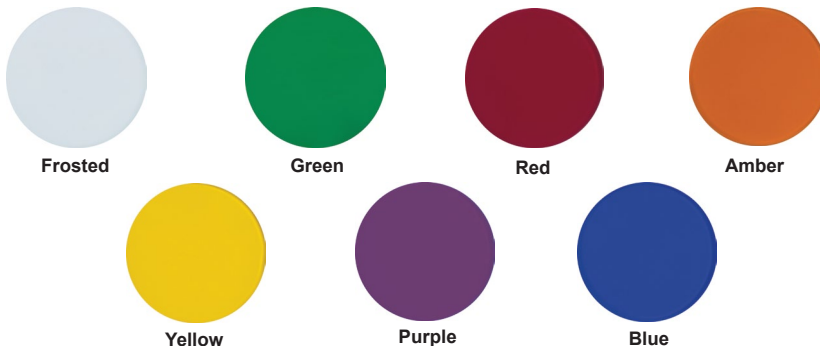

**NOTE:** Install additional O-ring (supplied) when color lenses are used.

### JOB INFORMATION

TYPE: \_\_\_\_\_ DATE: \_\_\_\_\_

JOB NAME & ADDRESS: \_\_\_\_\_

PRODUCT #: \_\_\_\_\_

TOTAL QUANTITY: \_\_\_\_\_

LAMP TYPE & WATTAGE: \_\_\_\_\_

TRANSFORMER: \_\_\_\_\_

CONTRACTOR: \_\_\_\_\_

SPECIFIER: \_\_\_\_\_

# SPECIFICATION SHEET

## PRODUCT # : CL-220-AB

• Well Light

• Cast Brass

### Fixture Specifications:

**Housing:** Heavy duty corrosion resistant cast brass with PVC sleeve.

**Faceplate:** Louvered cast brass, fitted to housing with silicone "O" ring gasket.

**Finish:** **AB-** Antique Bronze. Natural toning process. Finishes may vary due to artistic process. Also available in **GM-** Gun Metal, or **SI-** Silver plated.

**Lens:** Clear and heat resistant tempered flat glass.

**Lighting Source:** Integrated CREE LED module, 3 watt, 210 lumens 120° beam spread, 3000K, 20W halogen equivalent. Rated hours: 30,000.

**Wiring:** Fixture is prewired with a 18-2 20ft SPT-1W direct burial cord, pre-stripped for easy connection. Wire connector sold separately. Silicone filled wire nut (**CX-854**) is available from Corona Lighting.



**Gasket:** Silicone "O" ring, seals faceplate to housing, providing weather tight protection.

**Mounting:** Recessed flush mount. In-ground direct burial or concrete encasement install. Best used in concrete, brick, or other masonry surfaces.

**Electrical Notes:** Integrated CREE LED module is dimmable. A remote 12V magnetic transformer is required. Options are available from Corona Lighting. Not for use with electronic transformers. Voltage range for LED module is 8-18 Volt AC. Ambient Temperature: -4°F to 104°F. CRI: Ra > 80 Proper grease/lubricant is suggested on threaded parts during installation process.

**Applications:** Best used for up lighting, grazing, or backlighting. Install any place where a tiny recessed fixture may fit.


**Warranty:** Limited lifetime warranty on fixture housing and faceplate against manufacturer's defects. Ten (10) year warranty on LED modules and components.

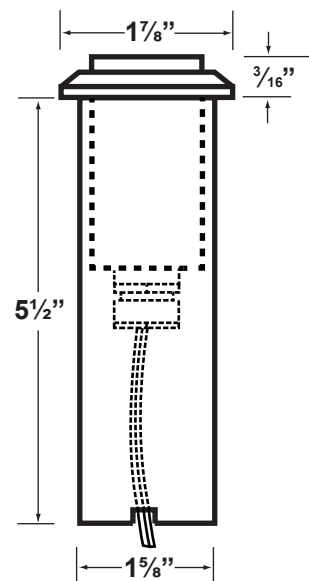

### DESIGNER COLOR LENSES INCLUDED WITH THIS FIXTURE:



Frosted



Green



Red



Amber



Yellow



Purple



Blue

**NOTE:** Install additional O-ring (supplied) when color lenses are used.

### JOB INFORMATION

TYPE: DATE:

JOB NAME &amp; ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE &amp; WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.

**PRODUCT # : CL-220-AB**

• Step Light

• Cast Brass

**Fixture Specifications:**

**Housing:** Heavy duty corrosion resistant cast brass with PVC sleeve.

**Faceplate:** Louvered cast brass, fitted to housing with silicone "O" ring gasket.

**Finish:** **AB-** Antique Bronze. Natural toning process. Finishes may vary due to artistic process. Also available in **GM-** Gun Metal, or **SI-** Silver plated.

**Lens:** Clear and heat resistant tempered flat glass.

**Lighting Source:** Integrated CREE LED module, 3 watt, 210 lumens 120° beam spread, 3000K, 20W halogen equivalent. Rated hours: 30,000.

**Wiring:** Fixture is prewired with a 18-2 20ft SPT-1W direct burial cord, pre-stripped for easy connection. Wire connector sold separately. Silicone filled wire nut (**CX-854**) is available from Corona Lighting.


**Gasket:** Silicone "O" ring, seals faceplate to housing, providing weather tight protection.

**Mounting:** Recessed flush mount. Best used in concrete, brick, or other masonry surfaces.


**Electrical Notes:** Integrated CREE LED module is dimmable. A remote 12V magnetic transformer is required. Options are available from Corona Lighting. Not for use with electronic transformers. Voltage range for LED module is 8-18 Volt AC. Ambient Temperature: -4°F to 104°F. CRI: Ra > 80 Proper grease/lubricant is suggested on threaded parts during installation process.

**Applications:** Seat walls, steps, stairs, decking, entry columns, outdoor living spaces, gazebos, or any place where a tiny recessed fixture may fit.

**Warranty:** Limited lifetime warranty on fixture housing and faceplate against manufacturer's defects. Ten (10) year warranty on LED modules and components.

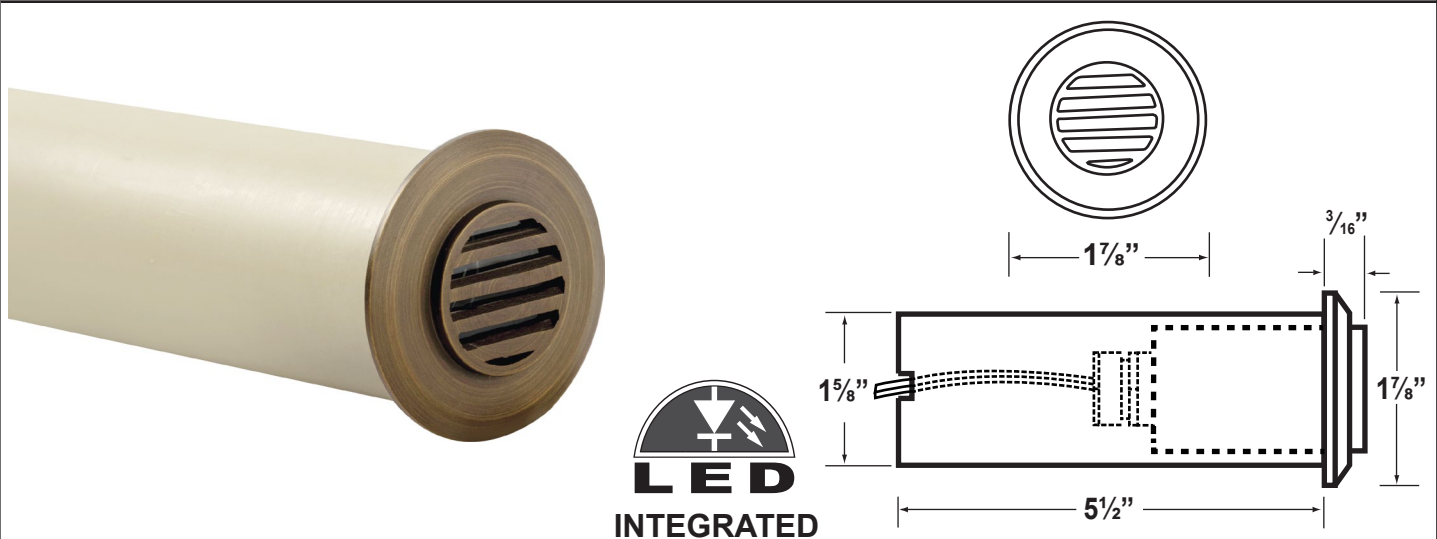

**DESIGNER COLOR LENSES INCLUDED WITH THIS FIXTURE:**

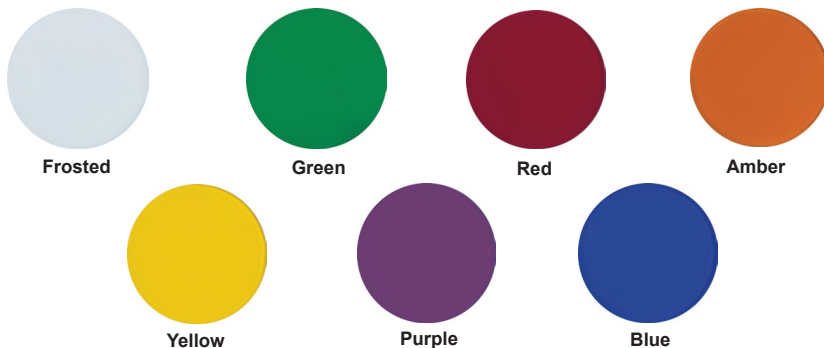

**NOTE:** Install additional O-ring (supplied) when color lenses are used.

**JOB INFORMATION**

TYPE: \_\_\_\_\_ DATE: \_\_\_\_\_

JOB NAME & ADDRESS: \_\_\_\_\_

PRODUCT #: \_\_\_\_\_

TOTAL QUANTITY: \_\_\_\_\_

LAMP TYPE & WATTAGE: \_\_\_\_\_

TRANSFORMER: \_\_\_\_\_

CONTRACTOR: \_\_\_\_\_

SPECIFIER: \_\_\_\_\_

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.