



WWW.CORONALIGHTING.COM

VALUE GRADE SERIES

1633 Staunton Ave  
Los Angeles, CA 90021

TEL. FAX.

(800) 727-9262 (800) 727-9957  
(213) 747-4500 (213) 747-3234

# SPECIFICATION SHEET

E-Mail: sales@coronalighting.com

## PRODUCT # : CL-501

• Directional Lights

• Die-Cast Aluminum

### Fixture Specifications:

**Housing:** Die-Cast Aluminum.

**Finish:** Polyester UV powder coated, available in: **BK- Black**, **BZ- Bronze**, **GR- Green**, **RT- Rust**, and **VG- Verde Green**.

**Lens:** Clear, tempered and heat resistant glass with silicone gasket.

**Socket:** Top grade loose bi-pin socket

**Lamp:** 12V, MR-16 halogen 35W max. L-BAB-C20 (20w) standard. LED lamps are also available. See lamp guide, below for more information.

**Wiring:** Fixture is prewired with a 3ft 18-2 SPT1-W direct burial cord. Wire connector sold separately. Universal connector (**CX-839**) or silicone filled wire nut (**CX-854**) is available from Corona Lighting.

**Gasket:** Silicone gasket providing weather tight protection.

**Knuckle:** Adjustable die-cast aluminum knuckle with thumb screw and 1/2" NPT threaded male hub on bottom.

**Mounting Spike:** Black 6" aluminum mounting spike with 1/2" NPT threaded female hub.

**Electrical Notes:** A remote 12V transformer is required. Options are available from Corona Lighting. Voltage range for 12V halogen lamps are 11V-12.5V. Voltage range for LED lamps are 10V-17V. Proper grease/lubricant is suggested on threaded parts during installation process.


**Warranty:** One (1) year warranty on fixture housing against manufacturer's defects.



BK FINISH SHOWN



3.5W and 5W

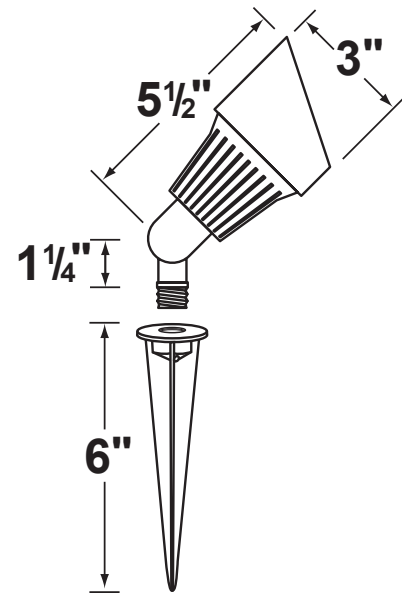

### AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
		SPREAD	LUMEN			
L-ED16-COB5W-SP	5	15° Spot	450	2700K	50,000	50 Watt
L-ED16-COB5W-FL	5	38° Flood	450	2700K	50,000	50 Watt
L-ED16-COB5W-WF	5	60° Wide Flood	450	2700K	50,000	50 Watt
L-ED16-COB5W-SP3K	5	15° Spot	470	3000K	50,000	50 Watt
L-ED16-COB5W-FL3K	5	38° Flood	470	3000K	50,000	50 Watt
L-ED16-COB5W-WF3K	5	60° Wide Flood	470	3000K	50,000	50 Watt
L-ED16-3W-SP	3.5	15° Spot	270	2700K	50,000	25 Watt
L-ED16-3W-FL	3.5	45° Flood	270	2700K	50,000	25 Watt
L-ED16-3W-WF	3.5	60° Wide Flood	270	2700K	50,000	25 Watt
L-ED16-5W-SP	5	15° Spot	350	2700K	50,000	40 Watt
L-ED16-5W-FL	5	45° Flood	350	2700K	50,000	40 Watt
L-ED16-5W-WF	5	60° Wide Flood	350	2700K	50,000	40 Watt

For more additional Lamps, and accessories visit [Coronalighting.com](http://Coronalighting.com)

### JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

• When ordering LED lamp with a fixture your part number should follow the format below:

• CL - product # - color - lamp - wattage - lamp angle

CL - 501 - BZ - L-ED16 - 5W - FL

Example: CL-501-BZ-L-ED16-5W-FL

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.