



WWW.CORONALIGHTING.COM

1633 Staunton Ave  
Los Angeles, CA 90021  
TEL. (800) 727-9262 (800) 727-9957  
FAX. (213) 747-4500 (213) 747-3234

ARCHITECTURAL GRADE SERIES

# SPECIFICATION SHEET

E-Mail: sales@coronalighting.com

## PRODUCT # : CL-807-D-BK

•Flexible BBQ- Deck Light

•Aluminum & Steel

### Fixture Specifications:

**Head:** Diecast aluminum

**Arm:** Flexible steel black polyolefin shrink wrap arm, available in 12", 24", and 36" length.

**Finish:** Polyester UV powder coated, with **BK- Black** finish. Also available in **SI- Silver Plated**

**Lens:** Clear, tempered and heat resistant glass.

**Socket:** Top grade bi-pin socket

**Lamp:** 12V, MR-16 halogen 35W max. L-BAB-C20 (20w) standard. LED lamps are also available. See lamp guide, below for more information.

**Mounting:** 3" round cast aluminum base canopy, chrome plated with on/off push button covered by rubber boot.

**Wiring:** Fixture is prewired with a 3ft direct burial cable. Wire connector sold separately. Universal connector (**CX-839**) or silicone filled wire nut (**CX-854**) is available from Corona Lighting.

**Electrical Notes:** A remote 12V transformer is required. Options are available from Corona Lighting. Voltage range for 12V halogen lamps are 11V-12.5V. Voltage range for LED lamps are 9V-17V. Proper grease/lubricant is suggested on threaded parts during installation process.


**Warranty:** Five (5) year warranty on fixture against manufacturer's defects.



CL-807-D-BK-36 is shown



3.5W and 5W

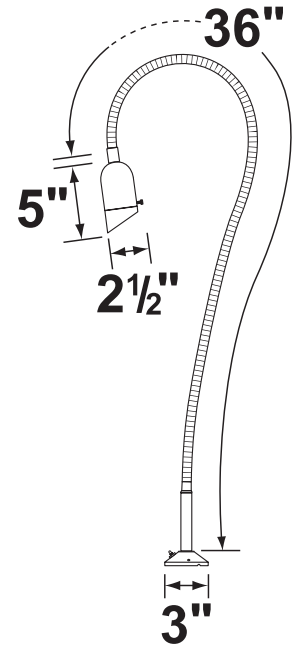

### AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

| LAMP NUMBER       | WATTS | BEAM           |       | COLOR & TEMP. | RATED HOURS | HALOGEN EQUIVALENT |
|-------------------|-------|----------------|-------|---------------|-------------|--------------------|
|                   |       | SPREAD         | LUMEN |               |             |                    |
| L-ED16-COB5W-SP   | 5     | 15° Spot       | 450   | 2700K         | 50,000      | 50 Watt            |
| L-ED16-COB5W-FL   | 5     | 38° Flood      | 450   | 2700K         | 50,000      | 50 Watt            |
| L-ED16-COB5W-WF   | 5     | 60° Wide Flood | 450   | 2700K         | 50,000      | 50 Watt            |
| L-ED16-COB5W-SP3K | 5     | 15° Spot       | 470   | 3000K         | 50,000      | 50 Watt            |
| L-ED16-COB5W-FL3K | 5     | 38° Flood      | 470   | 3000K         | 50,000      | 50 Watt            |
| L-ED16-COB5W-WF3K | 5     | 60° Wide Flood | 470   | 3000K         | 50,000      | 50 Watt            |
| L-ED16-3W-SP      | 3.5   | 15° Spot       | 270   | 2700K         | 50,000      | 25 Watt            |
| L-ED16-3W-FL      | 3.5   | 45° Flood      | 270   | 2700K         | 50,000      | 25 Watt            |
| L-ED16-3W-WF      | 3.5   | 60° Wide Flood | 270   | 2700K         | 50,000      | 25 Watt            |
| L-ED16-5W-SP      | 5     | 15° Spot       | 350   | 2700K         | 50,000      | 40 Watt            |
| L-ED16-5W-FL      | 5     | 45° Flood      | 350   | 2700K         | 50,000      | 40 Watt            |
| L-ED16-5W-WF      | 5     | 60° Wide Flood | 350   | 2700K         | 50,000      | 40 Watt            |

For more additional Lamps, and accessories visit [Coronalighting.com](http://Coronalighting.com)

### JOB INFORMATION

TYPE: \_\_\_\_\_ DATE: \_\_\_\_\_

JOB NAME & ADDRESS: \_\_\_\_\_

PRODUCT #: \_\_\_\_\_

TOTAL QUANTITY: \_\_\_\_\_

LAMP TYPE & WATTAGE: \_\_\_\_\_

TRANSFORMER: \_\_\_\_\_

CONTRACTOR: \_\_\_\_\_

SPECIFIER: \_\_\_\_\_

• When ordering LED lamp with a fixture your part number should follow the format below:

• **CL** - **product #** - **Length** - **lamp** - **wattage** - **lamp angle**

**CL - 807-D-BK - 36 - L-ED16 - 5W - FL**

Example: CL-807-D-BK-36-L-ED16-5W-FL

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.