

SPECIFICATION SHEET

PRODUCT # : CL-355

• Step Light

• Aluminum


Fixture Specifications:

Housing: Diecast aluminum
Finish: **WH-White.** Polyester UV powder coated. (BK color is discontinued)
Lens: Frosted, tempered anmd heat resistant glass lens
Socket: Top grade fixed T5 wedge socket
Lamp: 12V, T5 wedge, 18W max. L-WDG-921 (18w) standard. 1W LED lamp in 3000K-cool white color temperature is available. T5 incadescent lamps may also be ordered. See below for more information.
Mounting: Recessed mounted into concrete, brick or masonry
 Outdoor use only.

Wiring: Fixture prewired with a 3ft direct burial cord. Wire connector available seperately. Silicone filled wire nut (CX-854) may be ordered to Corona Lighting.
Gasket: Silicone "O" ring seals faceplate to housing providing weather tight protection.
Electrical Notes: A remote 12V transformer is required. Options are available from Corona Lighting. Voltage range for incadescent and LED lamps is 11-12.5V. Proper grease/lubricant is suggested on threaded parts during installation process.
Warranty: One year warranty providing protection against manufacturer's defects.



BK- Black finish is shown

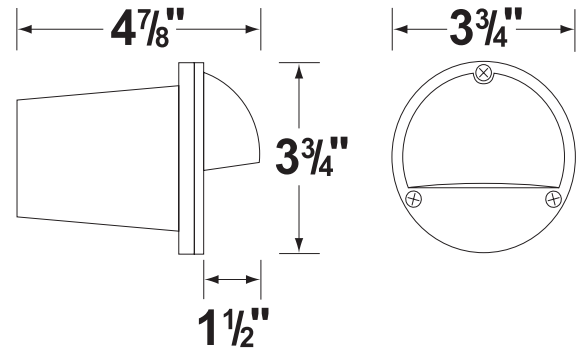

AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
		SPREAD	LUMEN			
L-EDT5-1.5W	1.5	180°	120	2700K	12,000	10 Watt

JOB INFORMATION

TYPE: _____ DATE: _____
 JOB NAME & ADDRESS: _____
 PRODUCT #: _____
 TOTAL QUANTITY: _____
 LAMP TYPE & WATTAGE: _____
 TRANSFORMER: _____
 CONTRACTOR: _____
 SPECIFIER: _____

AVAILABLE INCADESCENT LAMPS

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS
		SPREAD	LUMEN		
L-WDG-904	6		50	2700K	5,000
L-WDG-906	8		75	2700K	1,000
L-WDG-912	12		150	2700K	1,000
L-WDG-921	18		265	2700K	1,000

• When ordering a halogen or xenon lamp add lamp number to the product number. If you are ordering LED lamps you should follow the format below:

• CL - product # - lamp - wattage
 CL - 355-WH - L-EDT5 - 1.5W

Example: CL-355-WH-L-EDT5-1.5W

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.